

## Specification

- Stepped tubular galvanised steel columns, to BS EN 40-2:2004
- Mounting accessories are hot dip galvanised to BS EN ISO 1461:2009
- Supplied with wooden baseboard for mounting cable connection accessories
- Accessories are easily fixed with stainless steel grub screws and have an internal stop to ensure cable exit


## Non-standard columns

The following additional options are available on request:

- **3 and 4 way crossarms** - please ask us to confirm column suitability regarding head weight and windage.
- **Tubular steel columns with additional T-wash and matt black primer paint finish** - specify using suffix **PR** after column reference e.g. **FC5/PR/POT-89R**.
- **Flange plate mounted columns** - specify using suffix **FL** after column reference e.g. **FC5/FL/POT-89R**.
- **Mid/base hinged columns** - contact our Technical Department for further information

## UK delivery

Columns are delivered to site at a pre-arranged time. An off-loading service is not included and it is the responsibility of the client (or client's agent) for the safe undertaking of this requirement. A fork lift truck is recommended to minimise manual handling.

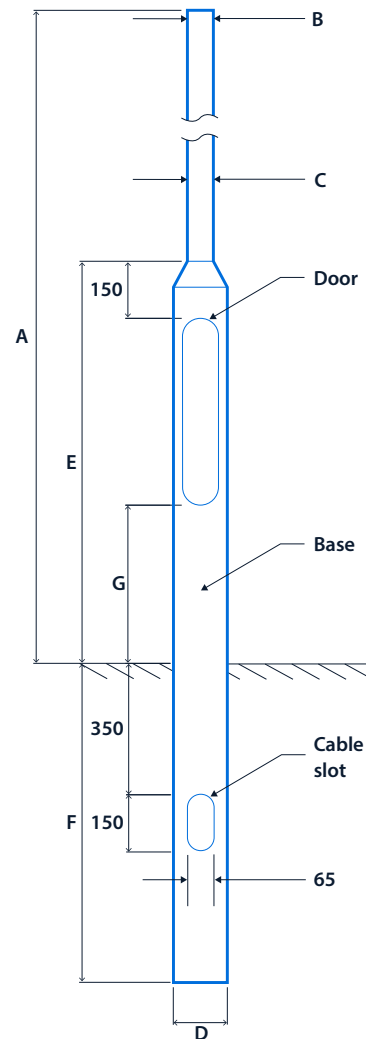

## Columns

CAT. No.	A NOMINAL HEIGHT	B TOP DIAMETER	C SHAFT DIAMETER	D BASE DIAMETER	E BASE HEIGHT	F PLANTING DEPTH	G DOOR HEIGHT	DOOR SIZE	BASEBOARD SIZE	APPROX. KG
<b>Single and twin luminaire columns</b>										
FC4	4 m	76	76	140	925	800	300	100 x 500	89 x 500	33
FC5	5 m	76	76	140	925	800	300	100 x 500	89 x 500	40
FC6	6 m	76	76	140	925	1000	300	100 x 500	89 x 500	44
FC8	8 m	101	114	168	1200	1200	400	115 x 600	89 x 600	100
FC10	10 m	101	114	168	1300	1500	500	115 x 600	89 x 600	142
FC12	12 m	101	140	192	1800	1700	1000	115 x 600	89 x 600	226
<b>Triple and quad luminaire columns</b>										
FC4/89	4 m	89	89	168	1280	800	300	115 x 600	89 x 500	60
FC5/89	5 m	89	89	168	1280	800	300	115 x 600	89 x 500	64
FC6/89	6 m	89	89	168	1280	800	300	115 x 600	89 x 500	68
FC8/89	8 m	89	114	168	1280	800	300	115 x 600	89 x 600	100
FC10/89	10 m	89	114	168	1280	1000	300	115 x 600	89 x 600	142