


High performance recessed colour temperature changing luminaires

The tunable white Hi-Style CA offers both opal and low glare optic versions for EN12464-1/LG7 compliance providing excellent wall and vertical illumination. The polycarbonate flame retardant TP(a) rated diffusers are designed to IP40 to exclude dust, dirt and flies.

Applications: Offices, healthcare, meeting rooms, call centres, school classrooms, libraries, control rooms, reception areas, lobbies, retail and circulation areas.

- Low glare optics for EN12464-1 / LG7 (<math><3000\text{cd/m}^2</math> @ 65°) or opal diffuser option
- Excellent wall and vertical illumination
- Balanced direct/indirect luminance control above 65°
- Suitable for most ceiling types; lay-in or pull up with optional side arm suspensions accessible from below
- Extruded side diffusers give vibrant yet low glare aesthetics
- Designed to exclude dust, dirt and flies
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit (CA versions)

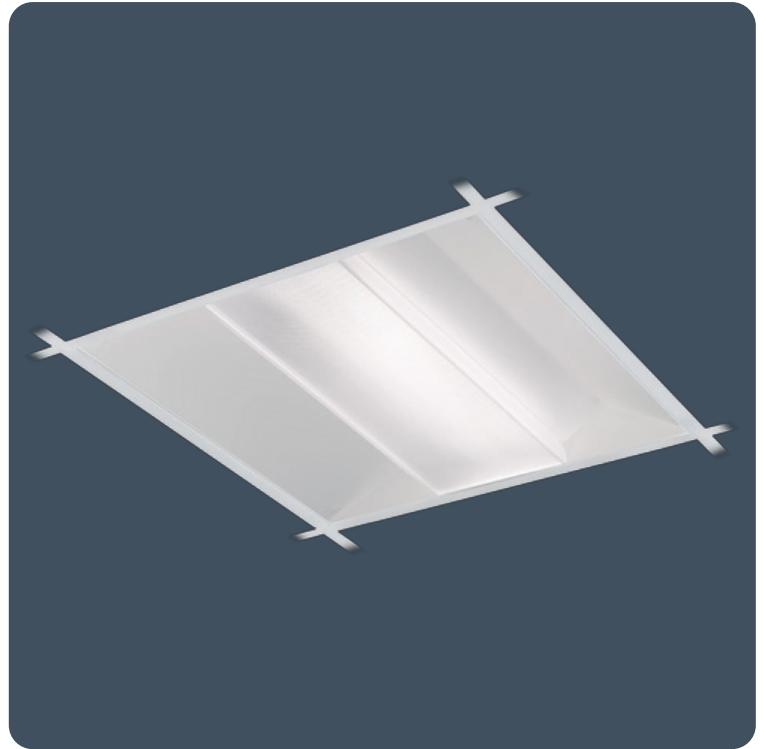

IP40 (IP20 above ceiling)

Up to 117.2 LL/CW

SMARTSCAN

LUXGUARD

Specification

Mounting	Recessed	IP rating	IP40 (IP20 above ceiling)
Nominal size	600 x 600 mm		

Lighting

Optic	Low glare diffuser Opal diffuser	Lumen output	2,110 lm - 3,080 lm
-------	-------------------------------------	--------------	---------------------

Emergency data

Emergency lumen output	515 lm - 545 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

Power

LED power	16 W - 34 W	Circuit power	18 W - 38 W
-----------	-------------	---------------	-------------



LED characteristics

CRI	80+	Colour temperature	3000 - 6500 K
Rated life (hours)	67 K - L80/B10		

Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class B	Thermoplastic rating	TP(a)

Dimensions

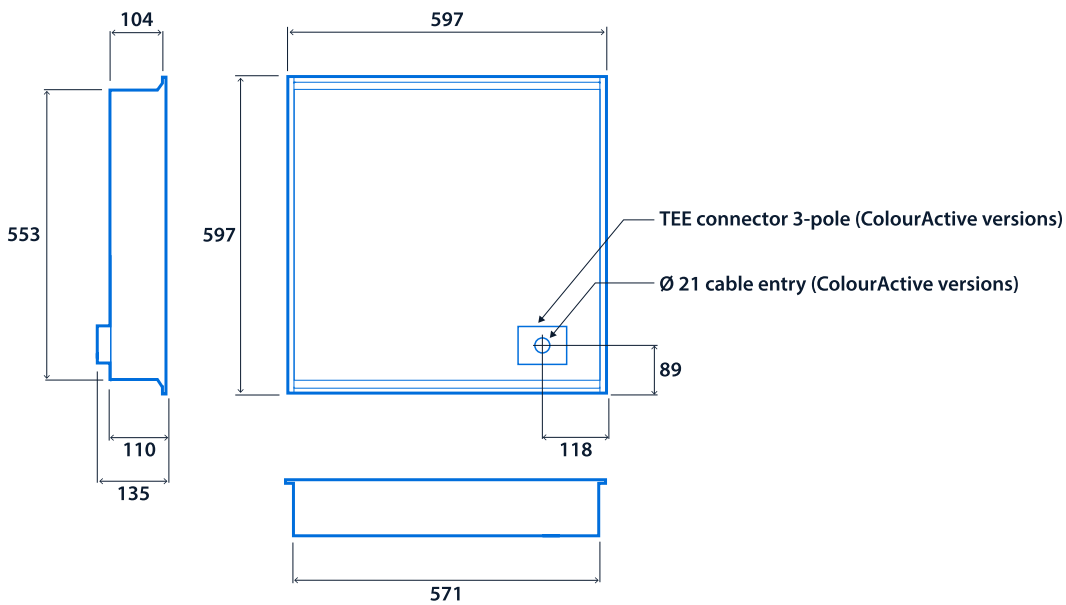



Click or scan here
View Hi-Style CA variants
using our online filtering tool



Information is correct as of 30 Jan 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.