


## Narrow, low-glare, recessed, asymmetric corridor LED luminaires

Narrow body recessed luminaire for use in hospital corridors. The edge-lit panel combined with carefully controlled optical distribution provide a low-glare asymmetric distribution to evenly illuminate hospital corridors from an off-centre position. The Radiance Corridor is specifically designed to provide a 'visual comfort zone' and helps provide compliance with CIBSE 2008 Hospital Lighting Guide (LG2).

Applications: Healthcare corridors.

- Carefully controlled optics provide a low glare asymmetric distribution to evenly illuminate hospital corridors from an off-centre position
- Edge-lit diffuser technology reduces visible LEDs
- Specifically designed to provide a 'visual comfort zone'
- Complies with CIBSE 2008 Hospital Lighting Guide (LG2)
- Suitable for most ceiling types; lay-in as standard or pull up with optional side arm suspensions
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

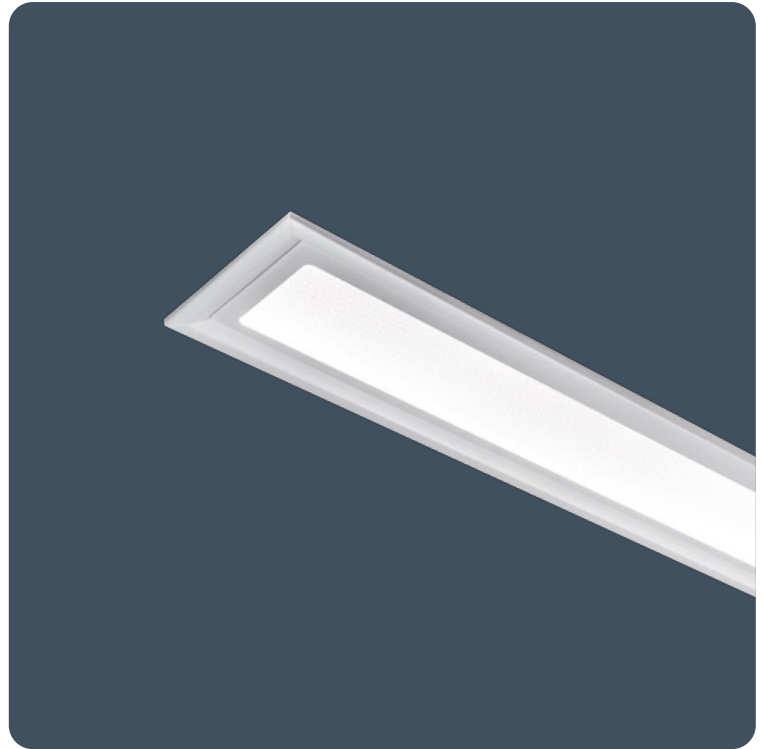

Notes: Bespoke sizes available to special order

IP40 (IP20 above ceiling)

114.6 LL/CW

SMARTSCAN

LUXGUARD

### Specification

Mounting	Recessed	IP rating	IP40 (IP20 above ceiling)
Max presence detection height	8 m		

### Lighting

Optic	Low glare diffuser	Lumen output	2,980 lm
Efficacy	114.6 LL/CW		

### Emergency data

Emergency lumen output	500 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

### Power

LED power	24 W	Circuit power	26 W
-----------	------	---------------	------



## LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	67 K - L80/B10		

## Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class A	Thermoplastic rating	TP(a)

## Dimensions

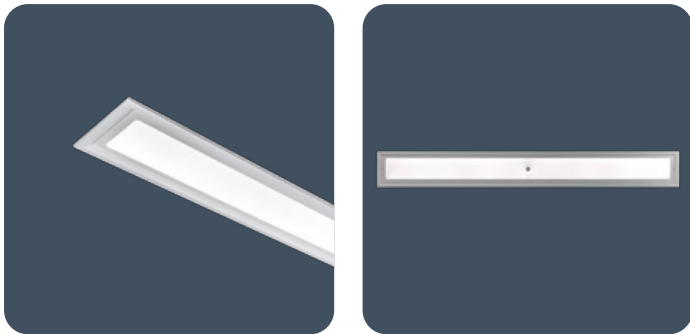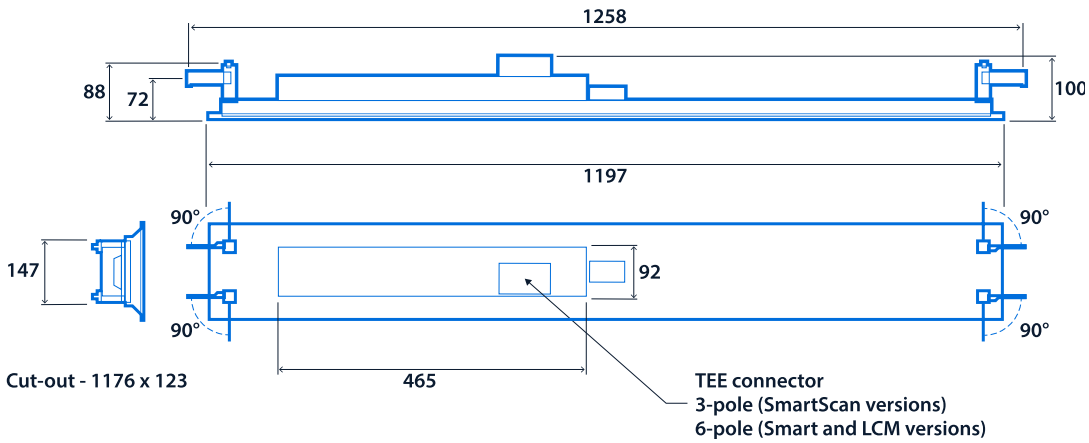



**Click or scan here**  
View Radiance Corridor  
variants using our online  
filtering tool



Information is correct as of 30 Jan 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.