Thorlux Light Line Integra



Suspended direct/indirect LED luminaires with ancilliary cable channel

The Thorlux Light Line Integra is an extension to the extremely successful suspended direct/indirect Thorlux Light Line range.

The Integra, designed as an all-in-one lighting and cable trunking solution features one earth shielded cable channel either side of the luminaire allowing on site fitment of wiring for ancillary equipment such as integrated fire detection, public address systems and telecommunications/IT cabling.

The infill sections for the Integra range feature optional 8 W Mina-S LED spotlights.

Applications: Schools, offices.

- Direct/indirect illumination
- Continuously mounted using link kits
- Supplied fully assembled
- Supplied with easily adjustable wire suspensions
- Fitted with plug and socket connections

Notes: Acoustic attenuation wings are only suitable for use with systems using infill sections



IP20

Up to 143.4 LL/CW





Specification

Mounting Suspended IP rating IP20

Max presence detection height 8 m

Lighting

Lumen output 4,015 lm - 6,485 lm Efficacy Up to 143.4 LL/CW

Emergency data

Emergency lumen output 370 lm Emergency type Maintained

Emergency duration 3 hours Battery specification Nickel Metal Hydride (NiMH)

Power

LED power 24 W - 42 W Circuit power 28 W - 48 W

Thorlux Light Line Integra



LED characteristics

CRI 80+ Colour temperature 4000 K

Rated life (hours) 90 K - L80/B10


Compliance

UKCA Yes CE Yes

Energy efficiency class This product contains a light source

of energy efficiency class A

Dimensions

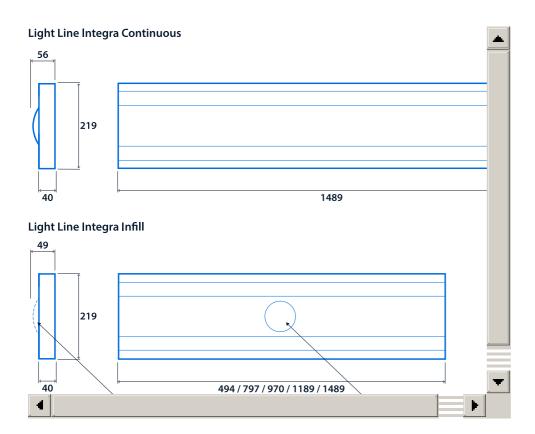

Thorlux Light Line Integra







Click or scan here View Thorlux Light Line Integra variants using our online filtering tool



Information is correct as of 30 Jan 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.