

Tamper, impact and ligature-resistant surface LED luminaires

Ligature-resistant, low profile, robust and durable luminaire with impact-resistant polycarbonate cover and extruded aluminium body with die-cast ends.

Applications: Cold stores, mental health, car parks, public areas, railway stations, foot bridges and underpasses.

- Body dissipates heat, ensuring long control gear life in higher ambient temperatures
- Suitable for both individual and in-line mounting
- Complies with food production standards IFS, HACCP and BRC
- SmartScan Radar versions with sensor discretely hidden behind the cover



IP65

IK11

Up to 83.0 LL/CW



Specification

Mounting	Surface	IP rating	IP65
Impact rating	IK11	Nominal size	700 mm 1300 mm
Max presence detection height	4 m		

Lighting

Optic	Clear prismatic cover	Lumen output	1,635 lm - 5,060 lm
Efficacy	Up to 83.0 LL/CW		

Emergency data

Emergency lumen output	380 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

Power

LED power	19 W - 56 W	Circuit power	22 W - 61 W
-----------	-------------	---------------	-------------


LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	50 K - L70/B10		

Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class C	Food production standards	BRC HACCP IFS

Dimensions

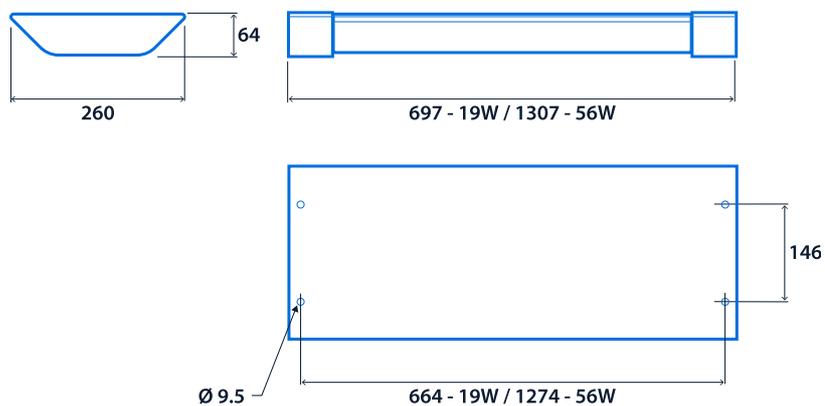



Click or scan here
View Ventego variants using
our online filtering tool



Information is correct as of 30 Jan 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.