

## Multi-purpose, anti-ligature and corrosion-resistant luminaires

Robust and durable luminaires with a polycarbonate cover. Extruded aluminium body with die-cast ends. Long life silicone sponge gasket ensuring IP66 rating. Cover secured using tamper-resistant pin Torx screws.

- Robust and durable extruded aluminium body dissipates heat, ensuring long control gear life in higher ambient temperatures
- High impact-resistant, flame-retardant polycarbonate cover
- Cover secured using tamper-resistant T25 pin Torx screws
- Removable gear tray, hangs on safety straps for easy maintenance
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP66

IK10

Up to 172 LL/CW

SMARTSCAN

LUXGUARD

### Specification

Mounting	Surface	IP rating	IP66
Impact rating	IK10	Nominal size	1200 mm 1500 mm
Max presence detection height	4 m		

### Lighting

Optic	Clear cover	Lumen output	3,030 lm - 8,145 lm
Efficacy	Up to 172 LL/CW		

### Emergency data

Emergency lumen output	560 lm - 630 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

### Power

LED power	16 W - 44 W	Circuit power	21 W - 55 W
-----------	-------------	---------------	-------------

### LED characteristics


CRI	80+	Colour temperature	4000 K
Rated life (hours)	100 K - L70/B10		

## Compliance

SmartScan wireless standards compliance

Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724

## Dimensions

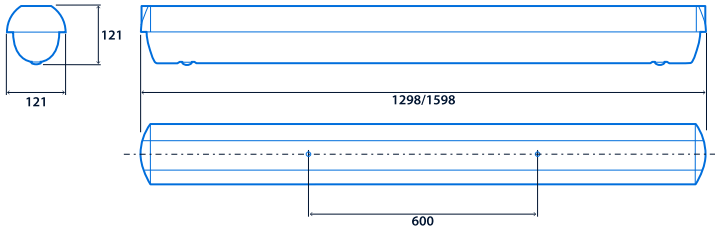

View the range



Information is correct as of 21 Nov 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.