

Emergency luminaires for surface mounting with dedicated SmartScan wireless technology versions

LED emergency luminaires for surface mounting with SmartScan wireless communication. Superb optical performance means fewer luminaires are required. Three hour, non-maintained emergency operation. Choice of IP54 square or IP66 circular body styles.

Applications: open plan areas, corridors, storerooms, toilets etc.

- Superb photometric performance
- Low standby power consumption (1.7 W total)
- Status indicator shows operational condition
- Reliable Nickel Metal Hydride (NiMH) battery technology
- Simple to install, full status reporting SmartScan wireless communication versions



Up to IP66

0 LL/CW

Lighting management

Emergency system	AutoTest Emergency SmartScan Emergency Standard Emergency
------------------	---

Specification

Mounting	Surface	IP rating	Up to IP66
----------	---------	-----------	------------

Emergency data

Emergency lumen output	235 lm - 270 lm	Emergency type	Non-maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)


Power

LED power	3 W	Circuit power	3 W
-----------	-----	---------------	-----

Compliance

UKCA	Yes	CE	Yes
SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724		

Dimensions

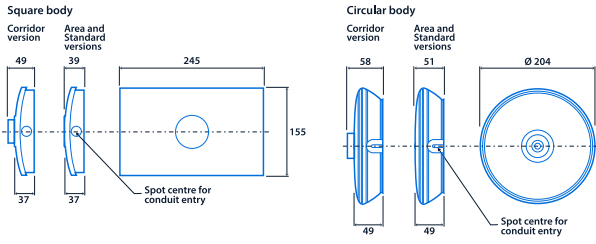

View the range



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.