## G3 MRI




## Non-ferrous circular downlight for use in MRI rooms

Non-ferrous recessed downlighter luminaires for use in magnetic resonance imaging (MRI) rooms. Remote gear box and non-ferrous downlighter head designed specifically to meet the requirements of MRI rooms. Non-maintained emergency version also available.

Applications: MRI rooms.

- Non-ferrous construction, designed for use in MRI rooms
- Two output circuits per DALI gearbox where each circuit can power a minimum of 5 downlighter heads, up to a maximum of 8
- Downlighter wiring configured for low EMI when used with EMI filters (supplied by others)
- Emergency status indicator LED can be remotely mounted outside of the room
- DALI dimmable control gear as standard. Can be used with push to make retractive switch for dimming and switching

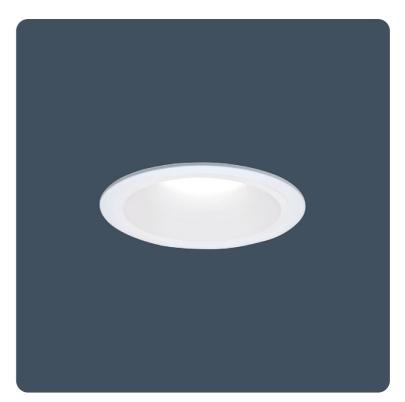



Lighting management			
Lighting control system	Dimming (DALI)	Emergency system	SmartScan Emergency Standard Emergency
Specification			
IP rating	IP20		
Lighting			
Lumen output	1,600 lm	Efficacy	133.3 LL/CW
Emergency data			
Emergency lumen output	800 lm	Emergency type	Non-maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)
Power			
LED power	6 W - 11 W	Circuit power	12 W
LED characteristics			

Colour temperature

4000 K

100 K - L80/B10

Rated life (hours)




## Compliance

UKCA Yes CE Yes

SmartScan wireless standards compliance

Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724

## **Dimensions**

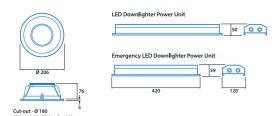



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.