

## Surface mounted colour temperature changing shallow profile controller luminaires

Tunable white shallow profile surface mounted luminaires with co-extruded 'Satin-Glo' polycarbonate controller.

Applications: schools, hospitals.

- Fitted with 3000 K and 6500 K LEDs for colour temperature control
- Shallow profile design
- ColourActive versions feature SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit



IP40

Up to 102.4 LL/CW

### Lighting management

Lighting control system	ColourActive ColourControl	Emergency system	AutoTest Emergency Non-emergency SmartScan Emergency Standard Emergency
-------------------------	-------------------------------	------------------	--

### Specification

Mounting	Surface	IP rating	IP40
Nominal size	1500 mm		

### Lighting

Optic	Satin-Glo diffuser	Lumen output	3,480 lm - 4,175 lm
Efficacy	Up to 102.4 LL/CW		

### Emergency data

Emergency lumen output	520 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

### Power

LED power	30 W - 37 W	Circuit power	34 W - 42 W
-----------	-------------	---------------	-------------


## LED characteristics

CRI	80+	Colour temperature	3000 - 6500 K
Rated life (hours)	63 K - L80/B10		

## Compliance

UKCA	Yes	CE	Yes
SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724		

## Dimensions

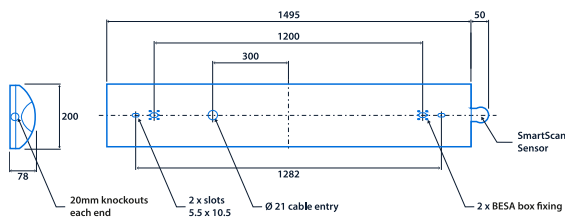



View the range



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.