Kast




Wall mounted up and downlighters

Wall mounted linear luminaires with upward and downward light component. Steel body finished in either white or black with opal polycarbonate diffusers. Can be mounted vertically as well as horizontally. Kast is ideal for corridors or stairwell applications.

Applications: corridors, stairwells, reception areas, meeting rooms, offices.

- Can be mounted horizontally or vertically
- Integral emergency and SmartScan emergency options
- SmartScan wireless technologyremoves the need for control cabling. Ideal for retrofit

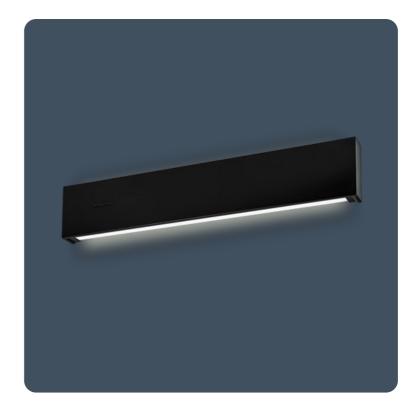

IP40

IK10

Up to 130 LL/CW





Lighting management

Lighting control system

Dimming (DALI) Non-dimming SmartScan Internal **Emergency system**

AutoTest Emergency Non-emergency SmartScan Emergency Standard Emergency

Specification

Mounting
Impact rating

Surface IK10 IP rating

Max presence detection height

IP40

8 m

Lighting

Optic Efficacy Opal diffuser Up to 130 LL/CW Lumen output

1,455 lm - 2,860 lm

Emergency data

Emergency lumen output Emergency duration 385 lm 3 hours Emergency type
Battery specification

Maintained

Nickel Metal Hydride (NiMH)

Power

LED power

10 W - 20 W

Circuit power

12 W - 22 W



LED characteristics

CRI 80+ Colour temperature 4000 K

Rated life (hours) 67 K - L80/B10

Compliance

UKCA Yes CE Yes


Energy efficiency class This product contains a light source of SmartScan wireless standards

energy efficiency class B compliance

Europe: EN 300 220-1 V2.4.1/EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless

Technology - GB2575724

Dimensions





Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.