

Edge-lit emergency exit signs with SmartScan wireless communication

LED emergency exit signs with a choice of acrylic legend panels. Optional mounting kits for wall, cantilever or semi-recessed mounting. Three hour, maintained emergency operation and SmartScan wireless communication versions.

Applications: commercial environments, education, hospitals and retail.

- Low power consumption (1 W total)
- Extremely long LED lifetime, up to 100,000 hours
- 19.5 m maximum viewing distance in accordance with BS EN 1838
- Ceiling mounted with optional kits for wall, cantilever and semi-recessed mounting
- Choice of legends
- Status indicator shows operational condition
- Reliable Nickel Metal Hydride (NiMH) battery technology



IP40

0 LL/CW

SMART-SCAN

Lighting management

Emergency system	AutoTest Emergency SmartScan Emergency Standard Emergency
------------------	---

Specification

Mounting	Surface	IP rating	IP40
----------	---------	-----------	------

Emergency data

Legend type	EURO arrow down EURO arrow left EURO arrow left / right double sided EURO arrow right ISO 7010 arrow down ISO 7010 arrow left ISO 7010 arrow left / right double sided ISO 7010 arrow right ISO 7010 arrow up	Maximum viewing distance	19.5 m
Emergency type	Maintained (wire link may be removed to enable non-maintained operation)	Emergency duration	3 hours
Battery specification	Nickel Metal Hydride (NiMH)		


Power

LED power	1 W	Circuit power	1 W
-----------	-----	---------------	-----

Compliance

UKCA SmartScan wireless standards compliance	Yes Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724	CE	Yes
---	---	----	-----

Dimensions

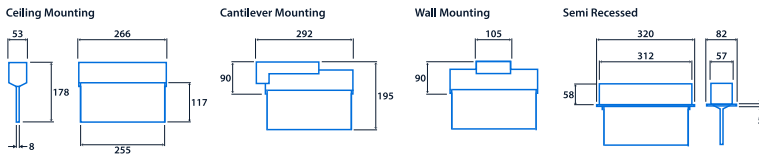



View the range



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.