

Emergency exit signs with dedicated SmartScan wireless technology versions

LED emergency exit signs with downlighter LED array which illuminates the exit doorway. Ceiling, wall, cantilever or suspension fixing. Fast-change battery replacement reduces maintenance time and cost.

Applications: commercial environments, schools, hospitals, banks, libraries etc.

- Extremely long LED lifetime, up to 100,000 hours
- 20 m maximum viewing distance in accordance with BS EN 1838
- Simple to install, full status reporting SmartScan wireless communication versions
- Optional 3 m wire suspension kit or cantilever mounting bracket
- Status indicator shows operational condition
- Hinged battery compartment (requires tool access) provides fast battery replacement
- Reliable Nickel Metal Hydride (NiMH) battery technology
- Available with a factory-fitted SmartScan Air Quality Sensor. (See Air Quality Sensor for more details)



IP40

64.7 LL/CW

Lighting management

Emergency system	AutoTest Emergency SmartScan Emergency Standard Emergency
------------------	---

Specification

Mounting	Surface	IP rating	IP40
----------	---------	-----------	------

Lighting

Lumen output	110 lm	Efficacy	64.7 LL/CW
--------------	--------	----------	------------

Emergency data

Legend type	EURO arrow down EURO arrow left / right double sided EURO arrow up ISO 7010 arrow down ISO 7010 arrow left / right double sided ISO 7010 arrow up	Maximum viewing distance	20 m
Emergency type	Maintained (wire link may be removed to enable non-maintained operation)	Emergency duration	3 hours
Battery specification	Nickel Metal Hydride (NiMH)		


Power

LED power	1 W	Circuit power	1.7 W
-----------	-----	---------------	-------

Compliance

UKCA SmartScan wireless standards compliance	Yes Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724	CE	Yes
---	---	----	-----

Dimensions

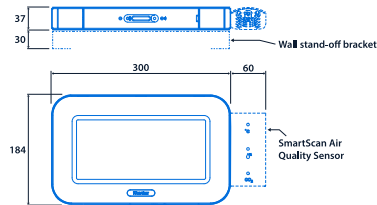



View the range



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.