

## Bedhead luminaires

Designed for use in hospital wards and compliant with the CIBSE 2008 Hospital Lighting Guide (LG2). LED versions. Separate switching facility for up and downlight operation. Optional centrally mounted 1W LED night light contained within the lower (downlight) compartment. Shallow depth extruded aluminium body with die-cast aluminium ends designed for easy cleaning and a curved and sloping top discourages use as a shelf and helps minimise dust build-up.

- Complies with the CIBSE 2008 Hospital Lighting Guide (LG2)
- Separate switching facility for up and down light operation
- Dimmable downlight for patient comfort
- Optional centrally mounted 1 W LED night light contained within the downlight compartment
- Curved and sloping top discourages use as a shelf and helps minimise dust build-up
- Version with back trunking section
- Complies with BS EN 60598-2-25

Notes: Uplight - non-dimming / Downlight - DALI dimming



IP40

## Lighting management

Lighting control system	Dimming (DALI)	Emergency system	Non-emergency
-------------------------	----------------	------------------	---------------

## Specification

Mounting	Surface	IP rating	IP40
Nominal size	1000 mm 1300 mm		

## Lighting

Optic	Opal diffuser	Lumen output (multiple)	Up to 2 x 3,755 lm
Efficacy (multiple)	Up to 91.0 ll/cw		

## Power

LED power (multiple)	Up to 2 x 38 W	Circuit power (multiple)	Up to 2 x 44 W
----------------------	----------------	--------------------------	----------------


## LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	50 K - L70/B10		

## Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class C		

## Dimensions

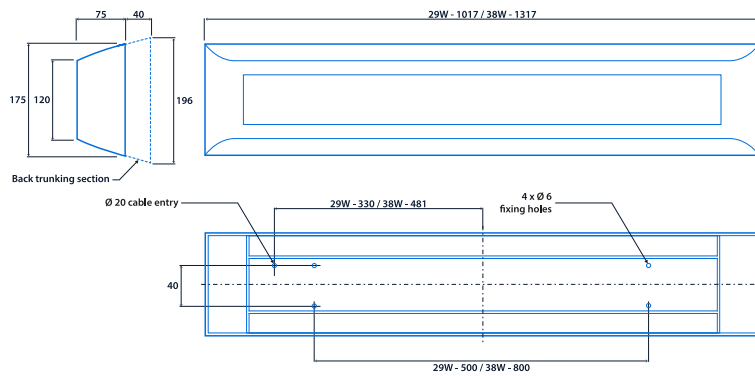

View the range



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.