

Adjustable recessed accent downlights

Recessed mounted display luminaires. 355° azimuth adjustment and a 60° vertical adjustment. 14 W or 20 W - 30° or 38° beam versions.

Applications: reception areas, retail, display, halls of residence, hotels, restaurants, public buildings.

- 38° beam angle
- 355° azimuth adjustment
- 60° vertical adjustment
- Supplied with remote gear unit fitted with 2 m lead
- Luminaires can be supplied pre-wired with a purpose made 1 m connection lead for plugging directly into the Smart Hub
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications

Notes: Black and silver finishes and CRI 80 version available to special order (minimum order quantity applies)



IP20

Up to 91.7 LL/CW

Lighting management

Lighting control system

Dimming (DALI)
Non-dimming

Emergency system

Non-emergency

Specification

Mounting

Recessed

IP rating

IP20

Lighting

Lumen output

1,430 lm - 2,110 lm

Efficacy

Up to 91.7 LL/CW

Power

LED power

14 W - 20 W

Circuit power

17 W - 23 W

LED characteristics

CRI

90+

Colour temperature

3000 K
4000 K


Rated life (hours)

50 K - L70/B10

Compliance

| | | | |
|-------------------------|---|----|-----|
| UKCA | Yes | CE | Yes |
| Energy efficiency class | This product contains a light source of energy efficiency class E | | |

Dimensions

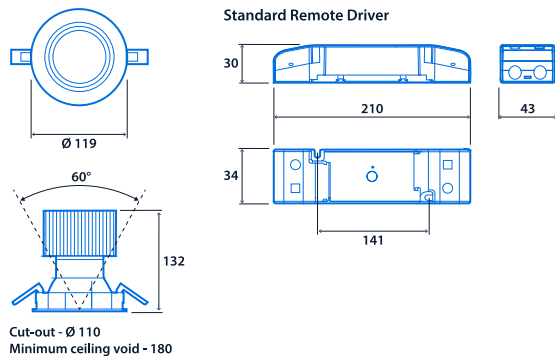

View the range



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.