

## Adjustable recessed accent downlights

Recessed mounted display luminaires. 355° azimuth adjustment and a 60° vertical adjustment. 5 W or 8 W versions.

Applications: reception areas, retail, display, halls of residence, hotels, restaurants, museums.

- Spot 21° and Flood 45° beam angle versions
- 355° azimuth adjustment
- 60° vertical adjustment
- Supplied with remote gear unit fitted with 2 m lead
- Luminaires can be supplied pre-wired with a purpose made 1 m connection lead for plugging directly into the Smart Hub
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications

Notes: Black and silver finishes and CRI 80 version available to special order (minimum order quantity applies)



IP20

Up to 87.5 LL/CW

## Lighting management

Lighting control system

Dimming (DALI)  
Non-dimming

Emergency system

Non-emergency

## Specification

Mounting

Recessed

IP rating

IP20

## Lighting

Lumen output

455 lm - 775 lm

Efficacy

Up to 87.5 LL/CW

## Power

LED power

5 W - 8 W

Circuit power

6 W - 9 W

## LED characteristics

CRI

90+

Colour temperature

3000 K  
4000 K


Rated life (hours)

60 K - L70/B10

## Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	<b>This product contains a light source of energy efficiency class E</b>		

## Dimensions

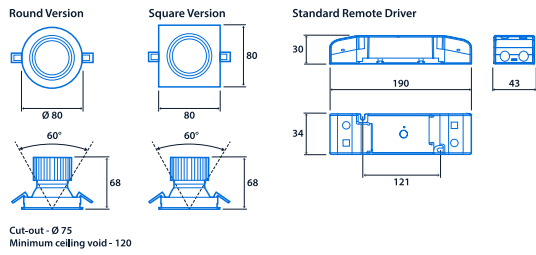



**View the range**



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.