

## Small LED emergency bulkhead luminaires

General purpose bulkhead with clear prismatic or opal polycarbonate cover. Optional self adhesive legend kit.

Applications: emergency lighting in light industrial areas and cable tunnels.

- 16.4 m maximum viewing distance in accordance with BS EN 1838 when using legend kits
- Optional self-adhesive legend kit
- Complies with M.O.D. JSP482 Chapter 8 Document for 'Category C' areas
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit
- SmartScan Radar versions with sensor discretely hidden behind the cover

Notes: Radar and clear cover versions not suitable for use with Legend Kits



IP65

Up to 114.2 LL/CW

SMARTSCAN

LUXGUARD

## Lighting management

Lighting control system

Non-dimming  
SmartScan Radar

Emergency system

AutoTest Emergency  
Non-emergency  
SmartScan Emergency  
Standard Emergency

## Specification

Mounting

Surface

IP rating

IP65

Max presence detection height

4 m

## Lighting

Optic

Linear prismatic cover  
Opal cover

Lumen output

590 lm - 685 lm

Efficacy

Up to 114.2 LL/CW

## Emergency data

Maximum viewing distance

16.5 m

Emergency lumen output

210 lm - 310 lm

Emergency type

Maintained  
Non-maintained

Emergency duration

3 hours

Battery specification

Nickel Metal Hydride (NiMH)

## Power

LED power	4 W	Circuit power	6 W
-----------	-----	---------------	-----


## LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	100 K - L80/B10		


## Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class B	Ball impact resistance	DIN EN 18032 Part 3 and DIN VDE 0710 Part 13
MOD compliance	JSP482 Chapter 8 Document for 'Category C' areas	SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724

## Dimensions

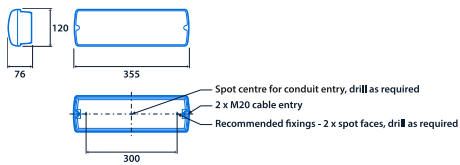

View the range



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.