Radiance Recessed



Recessed LED edge-lit luminaires

The Thorlux Radiance is a UK designed and manufactured LED edgelit panel built to a high specification. It uses fire retardant exposed parts and the control gear is housed in a metallic enclosure securely fixed to the rear of the luminaire. Several power choices are complemented with emergency derivatives and SmartScan energy saving versions.

Applications: offices, schools, retail.

- Low glare EN12464-1 / LG7 (<3000 cd/m² @ 65°) compliant or opal polycarbonate TP(a) fire-retardant diffuser options
- Edge-lit diffuser technology eliminates visible LEDs
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

Notes: High colour rendering CRI 90+ and 1200 x 600 versions available to special order



IP44 (IP20 above ceiling)

IK08

Up to 133.2 LL/CW





Specification

Mounting Recessed IP rating IP44 (IP20 above ceiling)

Impact rating IK08 Nominal size 600 x 600 mm

1200 x 300 mm

Max presence detection height 8 m

Lighting

Optic Low glare diffuser Lumen output 2,085 lm - 7,650 lm

Efficacy Up to 133.2 LL/CW

Opal diffuser

Emergency data

Emergency lumen output 310 lm - 335 lm Emergency type Maintained

Emergency duration 3 hours Battery specification Nickel Metal Hydride (NiMH)

Power

LED power 16 W - 51 W Circuit power 19 W - 59 W

Radiance Recessed



LED characteristics

 CRI
 80+
 Colour temperature
 4000 K

Rated life (hours) 67 K - L80/B10


Compliance


UKCA Yes CE Yes

Energy efficiency class This product contains a light source Thermoplastic rating TP(a)

of energy efficiency class B

Dimensions



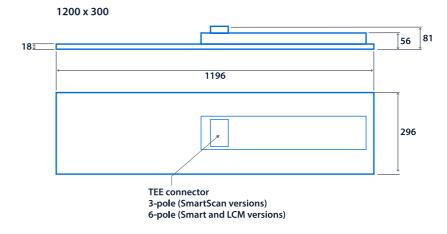

Radiance Recessed















Click or scan here

View Radiance Recessed variants using our online filtering tool



Information is correct as of 30 Jan 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.