

## Architectural surface mounted LED exit signs

Emergency exit sign luminaires with acrylic legend panel. Suitable for ceiling, wall or cantilever mounting.

Applications: commercial and retail environments.

- Low power consumption (1 W total)
- Extremely long LED lifetime, up to 100,000 hours
- Very easy battery compartment access
- Ceiling mounted with optional kits for wall and cantilever mounting
- 26 m maximum viewing distance in accordance with BS EN 1838
- Choice of legends
- Status indicator shows operational condition
- Reliable Nickel Metal Hydride (NiMH) battery technology



## Lighting management

Emergency system	AutoTest Emergency SmartScan Emergency
------------------	---

## Specification

Mounting	Surface	IP rating	IP20
----------	---------	-----------	------

## Emergency data

Legend type	EURO arrow down EURO arrow left EURO arrow left / right double sided EURO arrow right ISO 7010 arrow down ISO 7010 arrow left ISO 7010 arrow left / right double sided ISO 7010 arrow right ISO 7010 arrow up	Maximum viewing distance	26 m
Emergency type	Maintained	Emergency duration	3 hours
Battery specification	Nickel Metal Hydride (NiMH)		


## Power

LED power	4 W
-----------	-----

## Compliance

UKCA	Yes	CE	Yes
SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724		

## Dimensions

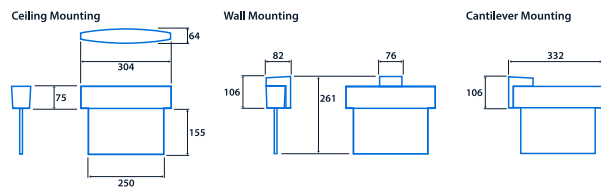

View the range



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.