


Corrosion-resistant polycarbonate luminaires

IP65 luminaires with injection moulded polycarbonate body and frosted prismatic polycarbonate cover, both fire-retardant.

Applications: cold stores, printing works, water treatment plants and pump rooms, industrial process areas, shower rooms and toilet blocks.

- Smooth easy-clean lines
- Snug-fit polycarbonate cover clips (stainless steel option)
- Fast installation via external stainless-steel brackets preserves IP rating
- Factory fitted 4-core through wiring option (alternative configurations to special order)
- Suitable for external applications if mounted under a canopy
- Complies with M.O.D. JSP482 Chapter 8 Document for 'Category C' areas
- SmartScan wireless technology removes the need for control cabling. Ideal for retro-fit

Notes: For ambient temperatures below the stated minimum contact the Thorlux Technical department

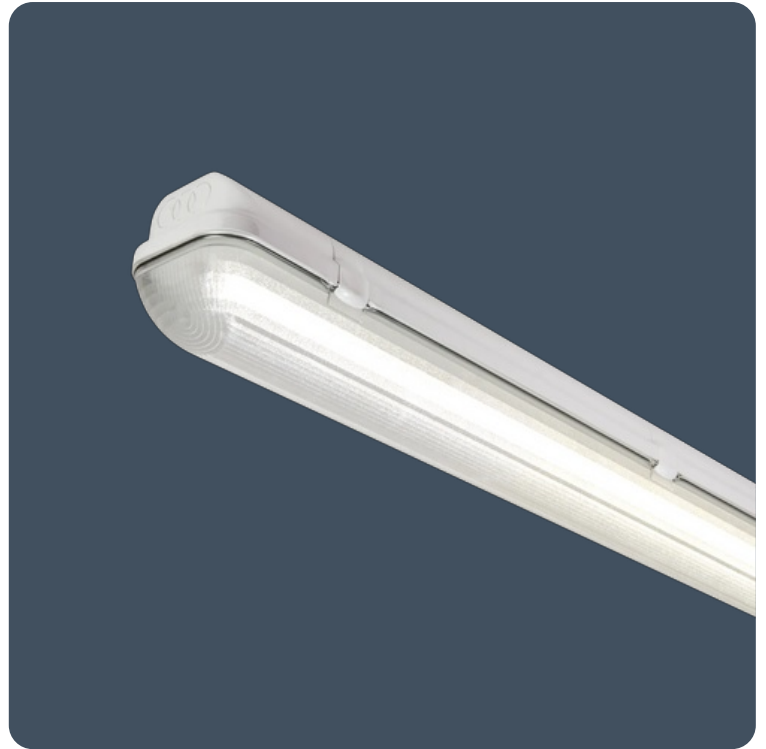

Up to IP65

Up to 132.4 LL/CW

SMARTSCAN

Lighting management

Lighting control system	Dimming (DALI) Non-dimming SmartScan Internal SmartScan Radar	Emergency system	AutoTest Emergency Non-emergency SmartScan Emergency Standard Emergency
-------------------------	--	------------------	--

Specification

Mounting	Surface	IP rating	Up to IP65
Max presence detection height	Up to 8 m		

Lighting

Optic	Frosted prismatic cover	Lumen output	3,700 lm - 9,535 lm
Efficacy	Up to 132.4 LL/CW		

Emergency data

Emergency lumen output	435 lm - 640 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

Power

LED power	23 W - 60 W	Circuit power	31 W - 72 W
-----------	-------------	---------------	-------------


LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	100 K - L70/B10		

Compliance

UKCA	Yes	CE	Yes
D Mark	Yes	Energy efficiency class	This product contains a light source of energy efficiency class D
Food production standards	HACCP IFS	MOD compliance	JSP482 Chapter 8 Document for 'Category C' areas
SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724		

Dimensions

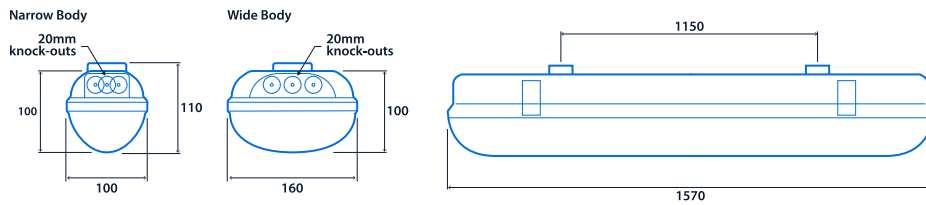

View the range



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.