

## Adjustable emergency 2 W LED spotlights for open areas

IP40 adjustable emergency 2 W LED spotlights for open areas. Toughened glass lamp cover.

Applications: Ideally suited for use in areas where more conventional methods of emergency lighting are not practical.

- Three hour, maintained emergency operation
- Available with narrow (29°) or wide (63°) beam
- Adjustable lamp head
- Suitable for wall or ceiling mounting
- Simple to install, full status reporting SmartScan wireless communication versions



IP40

0 LL/CW

### Lighting management

Emergency system	AutoTest Emergency SmartScan Emergency Standard Emergency
------------------	---

### Specification

Mounting	Surface	IP rating	IP40
----------	---------	-----------	------

### Emergency data

Emergency lumen output	260 lm	Emergency type	Maintained (wire link may be removed to enable non-maintained operation)
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)


### Power

LED power	2 W	Circuit power	2 W
-----------	-----	---------------	-----

## Compliance

UKCA	Yes	CE	Yes
SmartScan wireless standards compliance	Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724		

## Dimensions

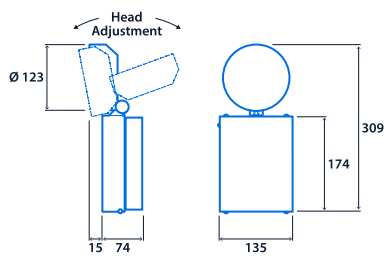

View the range



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.