


## Wireless transmitter to a single receiving group of luminaires

The SmartScan Wireless Switch Module is designed to work with conventional push-to-make wall switches and transmits wireless commands, for example on/o\_ and scenes, to a single receiving group of luminaires. Multiple switch modules can be located in proximity of the group to suit the user's requirements for switching locations. Long life battery operation means there is no mains wiring required, providing flexibility for switch locations and significantly reducing installation time and complexity.

- Can be connected to Push to Make switches (supplied by others)
- Designed to fit into a 35 mm deep back box
- The device is powered by two CR2032 coin cells, which can be replaced by unclipping the cover
- 5 inputs providing On (eco), Scenes 1, 2 and 3 and Max
- Programmable using the SmartScan Programmer
- Manual dimming control

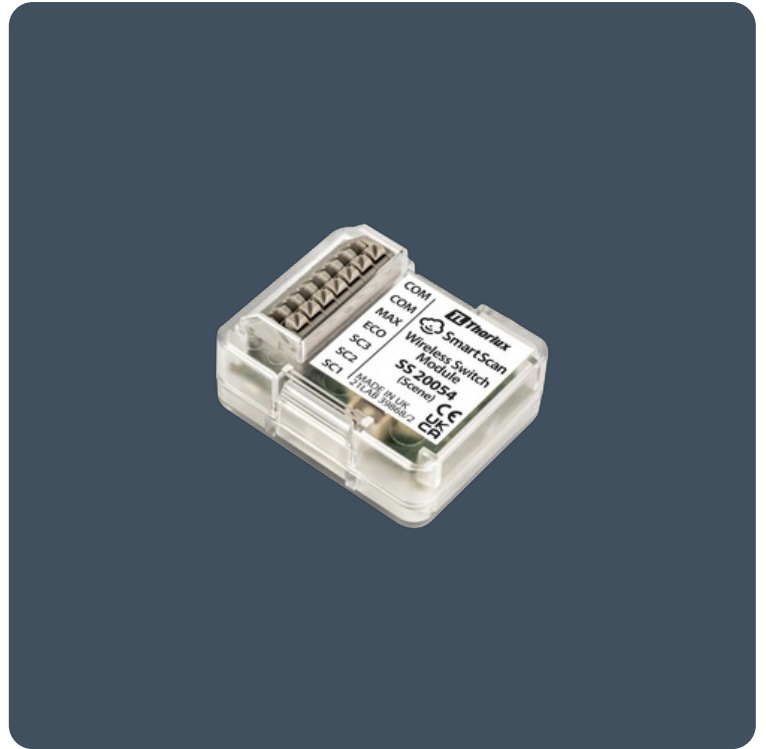


## Compliance

SmartScan wireless standards compliance

Europe: EN 300 220-1 V2.4.1/ EN 301 489-3 V1.6.1. Australasia: ACMA 2014 Radio Communication Standard 2014. Thorlux Patented Wireless Technology - GB2575724

## Dimensions





View the  
range



Information is correct as of 21 Nov 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.