

## Emergency exit signs with dedicated SmartScan wireless technology versions

LED emergency exit signs with downlighter LED array which illuminates the exit doorway. Ceiling, wall, cantilever or suspension fixing. Fast-change battery replacement reduces maintenance time and cost.

Applications: commercial environments, schools, hospitals, banks, libraries etc.

- Extremely long LED lifetime, up to 100,000 hours
- 20 m maximum viewing distance in accordance with BS EN 1838
- Simple to install, full status reporting SmartScan wireless communication versions
- Optional 3 m wire suspension kit or cantilever mounting bracket
- Status indicator shows operational condition
- Hinged battery compartment (requires tool access) provides fast battery replacement
- Reliable Nickel Metal Hydride (NiMH) battery technology
- Available with a factory-fitted SmartScan Air Quality Sensor. (See Air Quality Sensor for more details)



IP40

64.7 LL/CW



### Specification

Mounting	Surface	IP rating	IP40
----------	---------	-----------	------

### Lighting

Lumen output	110 lm	Efficacy	64.7 LL/CW
--------------	--------	----------	------------

### Emergency data

Legend type	EURO arrow down EURO arrow left / right double sided EURO arrow up ISO 7010 arrow down ISO 7010 arrow left / right double sided ISO 7010 arrow up	Maximum viewing distance	20 m
Emergency type	Maintained (wire link may be removed to enable non-maintained operation)	Emergency duration	3 hours
Battery specification	Nickel Metal Hydride (NiMH)		


**Power**

LED power	1 W	Circuit power	1.7 W
-----------	-----	---------------	-------

**Compliance**

UKCA	Yes	CE	Yes
------	-----	----	-----

**Dimensions**

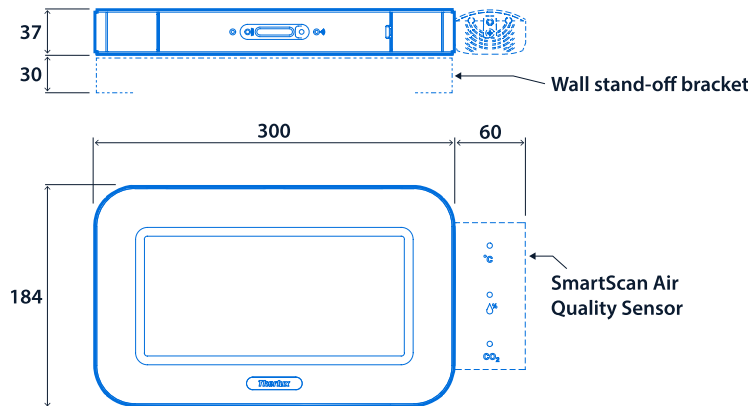



**Click or scan here**  
View Lexi variants using our  
online filtering tool



Information is correct as of 30 Jan 2025, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.