

Hazardous area LED anti corrosive luminaires for use in zones 2 and 22

IP66 Surface mounted LED luminaires suitable for Type 'n' (zones 2 & 22) areas. GRP moulded body with stainless steel cover clips and impact resistant frosted polycarbonate cover.

Applications: Zone 2 & 22 areas.

- Suitable for use in areas classified as low impact risk
- Factory fitted 5-core through wiring option
- 220-240 V, 50/60 Hz, as standard
- Suitable for ambient temperatures of -30°C to +40°C



IP66

IK10

Up to 159.6 LL/CW

Specification

Mounting	Surface	IP rating	IP66
Impact rating	IK10		

Lighting

Optic	Frosted cover	Lumen output	4,360 lm - 8,620 lm
Efficacy	Up to 159.6 LL/CW		

Emergency data

Emergency lumen output	750 lm	Emergency type	Maintained
Emergency duration	3 hours	Battery specification	Nickel Metal Hydride (NiMH)

Power

LED power	26 W - 52 W	Circuit power	28 W - 54 W
-----------	-------------	---------------	-------------


LED characteristics

CRI	80+	Colour temperature	5000 K
Rated life (hours)	100 K - L70/B10		

Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of Hazardous compliance energy efficiency class C		II 3 D Ex tc IIIC T80°C Dc II 3 G Ex ec IIC T4 Gc

Dimensions

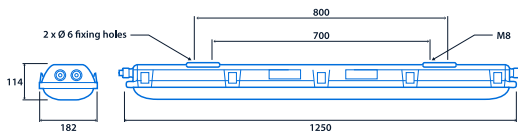

View the range



Information is correct as of 21 Dec 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.