

Stainless steel heavy duty corrosion resistant luminaires

Heavy duty corrosion resistant luminaires manufactured from 1.6mm stainless steel. Polycarbonate or 5mm toughened safety glass front panel.

- Body in 1.2 mm and front frame in 1.6 mm stainless steel
- 5 mm clear, flat, polycarbonate panel or 5 mm clear toughened/safety glass
- Asymmetric light distribution
- Quick-release front cover
- Specialist designs to suit application (subject to minimum order quantity)
- Retro-fit LED gear trays for upgrading original fluorescent versions available to special order



IP66

Up to 131.4 LL/CW

LUXGUARD

Lighting management

Lighting control system	Non-dimming	Emergency system	AutoTest Emergency Non-emergency Standard Emergency
-------------------------	-------------	------------------	---

Specification

Mounting	Surface	IP rating	IP66
----------	---------	-----------	------

Lighting

Optic	Clear glass cover Clear polycarbonate cover	Lumen output	3,865 lm - 5,255 lm
Efficacy	Up to 131.4 LL/CW		

Emergency data

Emergency type	Maintained	Emergency duration	3 hours
Battery specification	Nickel Metal Hydride (NiMH)		

Power

LED power	27 W - 35 W	Circuit power	34 W - 40 W
-----------	-------------	---------------	-------------


LED characteristics

CRI	80+	Colour temperature	4000 K
Rated life (hours)	100 K - L80/B10		

Compliance

UKCA	Yes	CE	Yes
Energy efficiency class	This product contains a light source of energy efficiency class B		

Dimensions

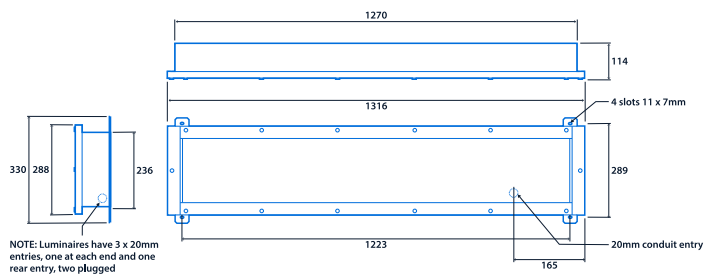

View the range



Information is correct as of 16 Oct 2024, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.